

MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2850	2850
PAY LOAD (KG)	650	650
WHEELBASE (MM)	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT (CM) / INTERNAL HEIGHT (CM)	320 / 208	320 / 208
HOMOLOGATED SEATS	6	6
BERTHS	8	8
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	200X127(110) - 208X128(110)	200X127(110) - 208X128(110)
REAR BED HEIGHT ADJUSTMENT	S	S
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	180X121	180X121
OVERCAB BED (CM)	160X209	160X209
LOCKER (USEFUL OPENING, CM)	115X95	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	137	137
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S

INSTALLATIONS

BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S

SKYLIGHT

REAR SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
DINETTE SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
TOILETTE PORTLIGHT (CM)	S (28X28)	S (28X28)

DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

EQUIPMENTS

THERMAL BLIND	S	S
BEDS WITH STAVES	S	S
CLOTHES RAIL IN THE SHOWER	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S


EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S(XL)	S(XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S(XL)	S(XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

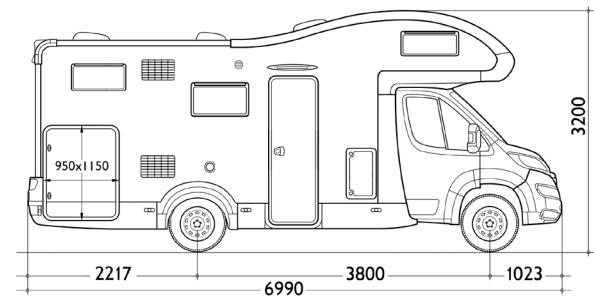

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
- 3 M > BARON 531
- 4 M > BARON 20, 560, 565
- 4.5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.
Active promotion in the launch price list and valid until further notice.


MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2850	2850
PAY LOAD (KG)	650	650
WHEELBASE (MM)	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)
DIMENSIONS AND PLACES		
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT (CM) / INTERNAL HEIGHT (CM)	320 / 208	320 / 208
HOMOLOGATED SEATS	7	7
BERTHS	7	7
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	87X212(74)- 83X212(70)	87X212(74)- 83X212(70)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	180X121 - 140X64	180X121 - 140X64
OVERCAB BED (CM)	160X209	160X209
LOCKER (USEFUL OPENING, CM)	125X70 - 125X60	125X70 - 125X60
MAX. INTERNAL GARAGE HEIGHT (CM)	138	138
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S
INSTALLATIONS		
BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S
SKYLIGHT		
REAR SKYLIGHT (MM)	S (400X400)/	S (400X400)/
DINETTE SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
TOILETTE PORTLIGHT (CM)	28X28	28X28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S
EQUIPMENTS		
HERMAL BLIND	S	S
BEDS WITH STAVES	S	S
CLOTHES RAIL IN THE SHOWER	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S
EXTERIORS		
ENTRANCE DOOR WITH FIXED WINDOW	S	S
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S	S
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

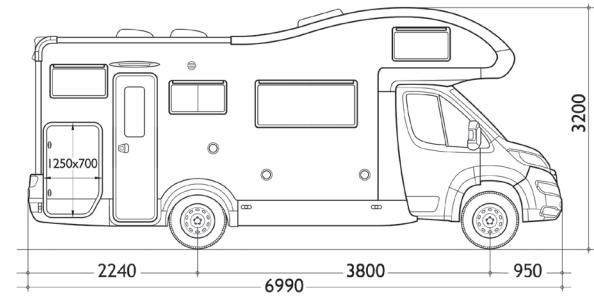

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
3 M > BARON 531
4 M > BARON 20, 560, 565
4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.

Active promotion in the launch price list and valid until further notice.

BARON 65



MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2850	2850
PAY LOAD (KG)	650	650
WHEELBASE (MM)	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S	S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	320 / 208	320 / 208
HOMOLOGATED SEATS	5	5
BERTHS	5	5
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	80X191+80X204 - 178X212	80X191+80X204 - 178X212
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X120(43)	216X120(43)
OVERCAB BED (CM)	160X209	160X209
LOCKER (USEFUL OPENING, CM)	115X80	115X80
MAX. INTERNAL GARAGE HEIGHT (CM)	121	121
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S

INSTALLATIONS

BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS)(L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S

SKYLIGHT

REAR SKYLIGHT (MM)	S (400X400)/ O (700X500)	S (400X400)/ O (700X500)
DINETTE SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
TOILETTE PORTLIGHT (CM)	S (28X28)	S (28X28)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S

EQUIPMENTS

THERMAL BLIND	S	S
BEDS WITH STAVES	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S



EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S (XL)	S (XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

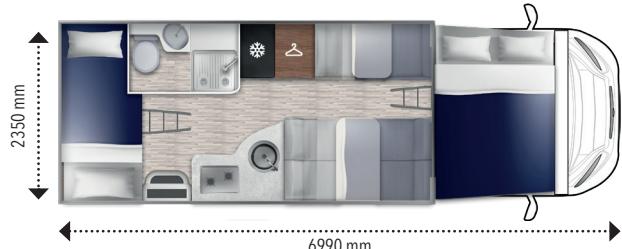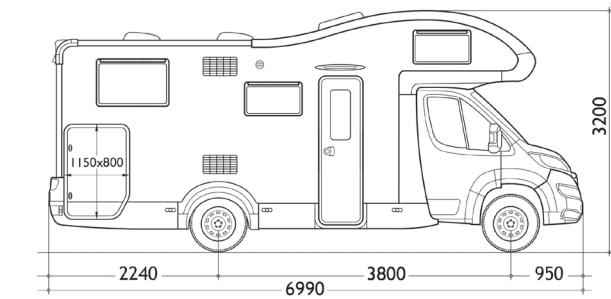

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
- 3 M > BARON 531
- 4 M > BARON 20, 560, 565
- 4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.

Active promotion in the launch price list and valid until further notice.

MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2690	2690
PAY LOAD (KG)	810	810
WHEELBASE (MM)	3450	3450
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S	S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	5990 / 2350	5990 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	295 / 208	295 / 208
HOMOLOGATED SEATS	4	4
BERTHS	4	4
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	216X130(125)	216X130(125)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	208X95(78)	208X95(78)
ELEVATING BED (CM)	190X81	190X81
LOCKER (USEFUL OPENING, CM)	115X80 - 90X45	115X80 - 90X45
MAX. INTERNAL GARAGE HEIGHT(CM)	121	121
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S

INSTALLATIONS

BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS)(L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP.PLUS DIGITAL CONTROL PANEL	S	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
CENTRAL SKYLIGHT (MM)	S (400X400)	S (400X400)
TOILETTE PORTLIGHT(CM)	S (28X28)	S (28X28)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S

EQUIPMENTS

THERMAL BLIND	S	S
BEDS WITH STAVES	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S


EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S (XL)	S (XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

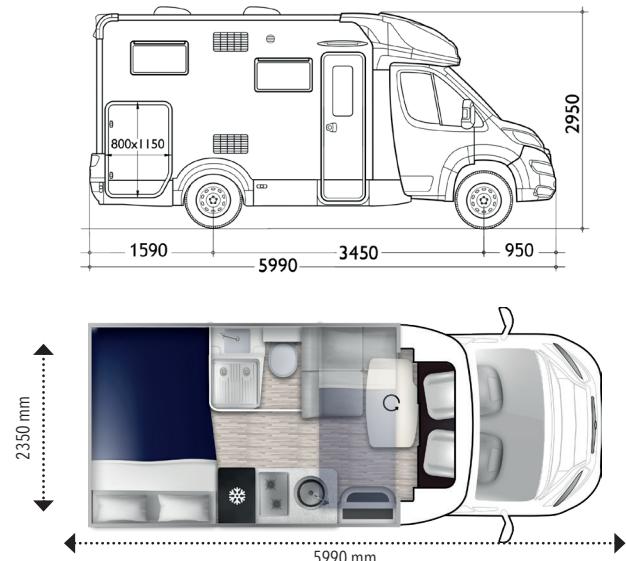

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
- 3 M > BARON 531
- 4 M > BARON 20, 560, 565
- 4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.
Active promotion in the launch price list and valid until further notice.

BARON 560



MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2860	2860
PAY LOAD (KG)	640	640
WHEELBASE (MM)	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S	S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	295 / 208	295 / 208
HOMOLOGATED SEATS	5	5
BERTHS	5	5
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	207X130	207X130
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	S	S
ELECELEVATING BED (CM)	216X97(89)	216X97(89)
ADDITIONAL SEAT REAR BED	190X123(103)	190X123(103)
LOCKER (USEFUL OPENING, CM)	115X95	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	125	125
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S

INSTALLATIONS

BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS)(L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
CENTRAL SKYLIGHT (MM)	S (400X400)	S (400X400)
TOILETTE PORTLIGHT(CM)	S (28X28)	S (28X28)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S

EQUIPMENTS

HERMAL BLIND	S	S
BEDS WITH STAVES	S	S
CLOTHES RAIL IN THE SHOWER	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S



EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S (XL)	S (XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

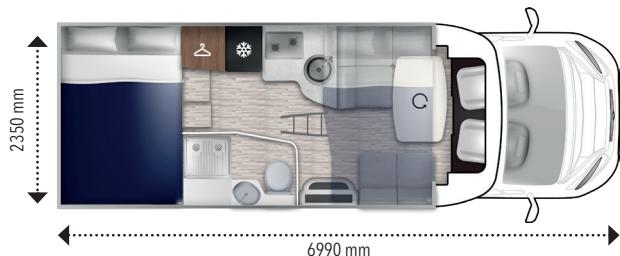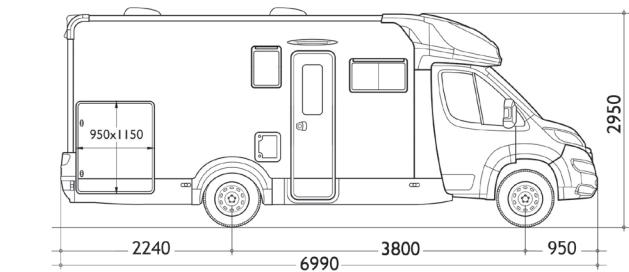

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
- 3 M > BARON 531
- 4 M > BARON 20, 560, 565
- 4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.
Active promotion in the launch price list and valid until further notice.

BARON 565




MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2840	2840
PAY LOAD (KG)	660	660
WHEELBASE (MM)	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S	S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)
DIMENSIONS AND PLACES		
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	295 / 208	295 / 208
HOMOLOGATED SEATS	5	5
BERTHS	5	5
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	80X191 + 80X204 - 178X212	80X191 + 80X204 - 178X212
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X105(43)	216X105(43)
ELEVATING BED (CM)	190X113(93)	190X113(93)
ADDITIONAL SEAT REAR BED	S	S
LOCKER (USEFUL OPENING, CM)	115X80	115X80
MAX. INTERNAL GARAGE HEIGHT (CM)	121	121
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S
INSTALLATIONS		
BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS)(L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
SHOWER TRAY WITH DOUBLE DRAIN	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S
SKYLIGHT		
PANORAMIC ROOF (MM)	S (1000X800)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (700X500)	S (400X400) / O (700X500)
CENTRAL SKYLIGHT (MM)	S (400X400)	S (400X400)
TOILETTE PORTLIGHT (CM)	S (28X28)	28X28
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S
EQUIPMENTS		
THERMAL BLIND	S	S
BEDS WITH STAVES	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S
EXTERIORS		
ENTRANCE DOOR WITH FIXED WINDOW	S (XL)	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S (XL)	S (XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

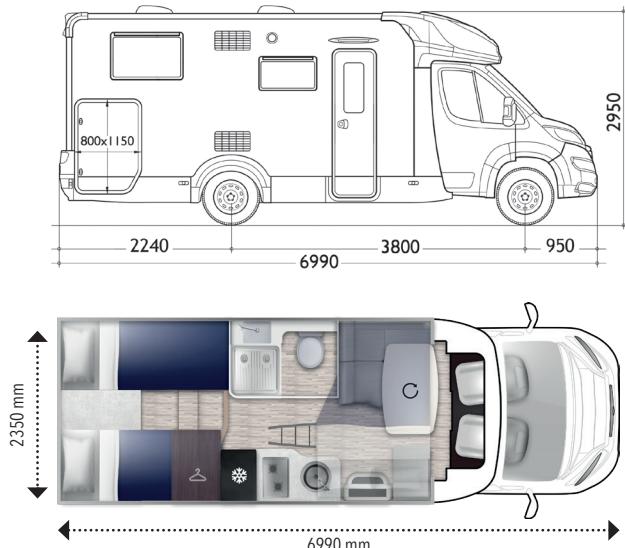

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
 - 3 M > BARON 531
 - 4 M > BARON 20, 560, 565
 - 4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.
Active promotion in the launch price list and valid until further notice.


MECHANICS AND CHASSIS

	FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		
ENGINE, POWER	2,2 MJ 140 HP	2,2 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2920	2920
PAY LOAD (KG)	580	580
WHEELBASE (MM)	4035	4035
MAXIMUM TOWABLE WEIGHT (KG)	2000	2000
WHEELS DIMENSIONS	15"	15"
MANUAL AIR CONDITIONING	S	S
DRIVER AND PASSENGER AIRBAG	S	S
CRUISE CONTROL WITH SPEED LIMITER	S	S
ABS / ESC	S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S	S
CAB SEAT COVERS	S	S
PAINTED FRONT BUMPER	O BARON 75 PACK)	O BARON 75 PACK)
DIMENSIONS AND PLACES		
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	7450 / 2350	7450 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	295 / 208	295 / 208
HOMOLOGATED SEATS	5	5
BERTHS	5	5
AUXILIARY BED IN DINETTE	S	S
REAR BED (CM)	80X200 + 80X200 - 200X212	80X200 + 80X200 - 200X212
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X97(89)	216X97(89)
ELEVATING BED (CM)	190X123(103)	190X123(103)
ADDITIONAL SEAT REAR BED	S	S
LOCKER (USEFUL OPENING, CM)	115X95	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	121	121
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S	S
INSTALLATIONS		
BURNERS	2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS)(L)	137	137
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S	S
INTEGRATED AND ISOLATED ENTRY STEP	S	S
HEATED GARAGE LOCKER	S	S
CP-PLUS DIGITAL CONTROL PANEL	S	S
SKYLIGHT		
PANORAMIC ROOF (MM)	S(1000X800)	S(1000X800)
REAR SKYLIGHT (MM)	S(400X400) / O(700X500)	S(400X400) / O(700X500)
CENTRAL SKYLIGHT (MM)	S(400X400)	S(400X400)
TOILETTE PORTLIGHT (CM)	S(28X28)	S(28X28)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S	S
EQUIPMENTS		
HERMAL BLIND	S	S
BEDS WITH STAVES	S	S
CLOTHES RAIL IN THE SHOWER	S	S
SWIVELLING LCD HOLDER	S	S
INTERNAL LED LIGHTENING	S	S
WINTER PACK	S	S
ISOFIX	S	S
EXTERIORS		
ENTRANCE DOOR WITH FIXED WINDOW	S(XL)	S(XL)
FLYSCREEN FOR ENTRANCE DOOR	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S(XL)	S(XL)
EXTERNAL LED LIGHT	S	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

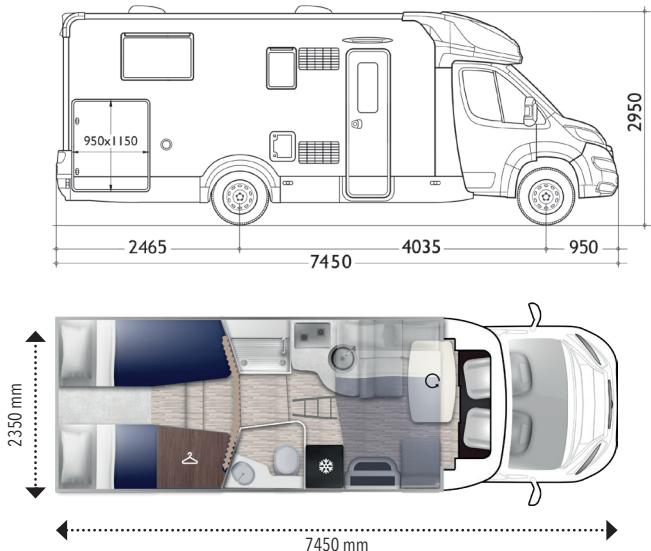

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
 - 3 M > BARON 531
 - 4 M > BARON 20, 560, 565
 - 4,5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK


- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

*Baron 75 Pack optional at zero cost.
Active promotion in the launch price list and valid until further notice.

BARON 579



MECHANICS AND CHASSIS		FIAT DUCATO	CITROËN JUMPER
MECHANICAL UNIT		2,2 MJ 140 HP	2,2 140 HP
ENGINE, POWER		3500	3500
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)		2920	2920
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)		580	580
PAY LOAD (KG)		4035	4035
WHEELBASE (MM)		2000	2000
WHEELS DIMENSIONS		15"	15"
MANUAL AIR CONDITIONING		S	S
DRIVER AND PASSENGER AIRBAG		S	S
CRUISE CONTROL WITH SPEED LIMITER		S	S
ABS / ESC		S/S	S/S
DRIVER AND PASSENGER SWIVELLING SEATS		S	S
CAB SEAT COVERS		S	S
PAINTED FRONT BUMPER		O BARON 75 PACK	O BARON 75 PACK)
DIMENSIONS AND PLACES			
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)		7450 / 2350	7450 / 2350
EXTERNAL HEIGHT (CM) / INTERNAL HEIGHT (CM)		295 / 208	295 / 208
HOMOLOGATED SEATS		5	5
BERTHS		5	5
AUXILIARY BED IN DINETTE		S	S
REAR BED (CM)		150X190	150X190
ELECTRIC REAR BED HEIGHT ADJUSTMENT		S	S
DIMENSIONS AUXILIARY BED IN DINETTE (CM)		216X97(89)	216X97(89)
ELEVATING BED (CM)		190X123(103)	190X123(103)
LOCKER (USEFUL OPENING, CM)		115X95	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)		125	125
FLOOR / WALLS / ROOF THICKNESS (CM)		5,4 / 3 / 3	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL		MTS / VTR / VTR	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF		S	S
INSTALLATIONS			
BURNERS		2	2
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)		20(100)/100	20(100)/100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)		137	137
STANDARD HEATING SYSTEM		COMBI DIESEL 4 KW	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)		S	S
INTEGRATED AND ISOLATED ENTRY STEP		S	S
HEATED GARAGE LOCKER		S	S
CP-PLUS DIGITAL CONTROL PANEL		S	S
SKYLIGHT			
PANORAMIC ROOF (MM)		S (1000X800)	S (1000X800)
REAR SKYLIGHT (MM)		S (400X400) / O (700X500)	S (400X400) / O (700X500)
CENTRAL SKYLIGHT (MM)		S (400X400)	S (400X400)
TOILETTE PORTLIGHT (CM)		S (28X28)	S (28X28)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET		S	S
EQUIPMENTS			
THERMAL BLIND		S	S
BEDS WITH STAVES		S	S
CLOTHES RAIL IN THE SHOWER		S	S
SWIVELLING LCD HOLDER		S	S
INTERNAL LED LIGHTENING		S	S
WINTER PACK		S	S
ISOFIX		S	S
EXTERIORS			
ENTRANCE DOOR WITH FIXED WINDOW		S (XL)	S (XL)
FLYSCREEN FOR ENTRANCE DOOR		S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS		S (XL)	S (XL)
EXTERNAL LED LIGHT		S	S

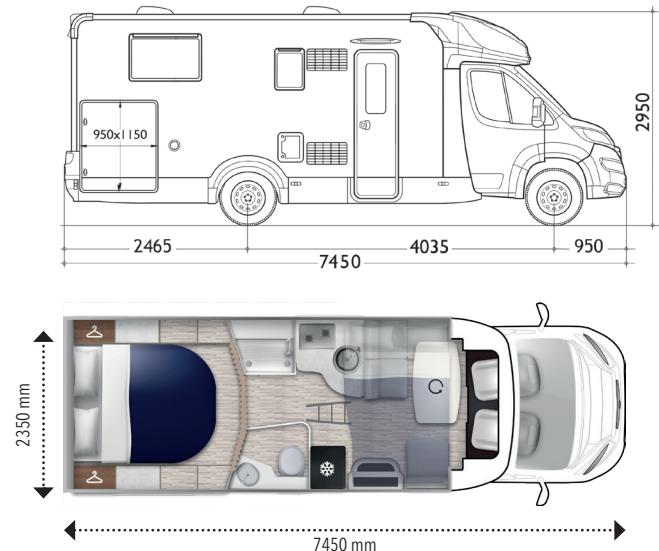

BARON 75 PACK

- FOG LIGHTS
- PAINTED BUMPER
- BLACK SKID PLATE
- BICOLOR 16" ALLOY WHEEL RIMS
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- PIONEER 9" TOUCHSCREEN RADIO
- SINGLE REAR-VIEW CAMERA
- 200W SOLAR PANEL WITH MPPT CONTROLLER
- PLEATED CAB BLIND

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6F HEATING [DIESEL + ELECTRIC]

ENJOY OUTDOOR PACK

- WHITE AWNING
 - 3 M > BARON 531
 - 4 M > BARON 20, 560, 565
 - 4.5 M > BARON 65, 22, 573, 579
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12V/ 220V/ TV)
- EQUIPPED GARAGE WALL
- EXTERNAL GAS SOCKET

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

S= standard O=optional - = not available VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max. 15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Active promotion in the launch price list and valid until further notice.

The masses indicated in this data sheets refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYOUT

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage. All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.