

T-LOFT 450



MECHANICS AND CHASSIS

MECHANICAL UNIT	FIAT DUCATO
ENGINE, POWER	2,2 MJ 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2860
PAY LOAD (KG)	640
WHEELBASE (MM)	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16"
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350
EXTERNAL HEIGHT(CM) / INTERNAL HEIGHT (CM)	295 / 208
HOMOLOGATED SEATS	5
BERTHS	5
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	207X130
REAR BED HEIGHT ADJUSTMENT	S
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X97(89)
ELEVATING BED (CM)	190X123(103)
LOCKER (USEFUL OPENING, CM)	115X95
MAX. INTERNAL GARAGE HEIGHT(CM)	125
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100) / 100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	135
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED AND ISOLATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
CP-PLUS DIGITAL CONTROL PANEL	S

SKYLIGHT

PANORAMIC ROOF (MM)	S(1000X800)
REAR SKYLIGHT (MM)	S(400X400) / O(960X655)
CENTRAL SKYLIGHT (MM)	S(400X400)

DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET

S

EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
CLOTHES RAIL IN THE SHOWER	S
SWIVELLING LCD HOLDER	S
INTERNAL LED LIGHTENING	S
WINTER PACK	S
ISOFIX	S



EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S
FLYSCREEN FOR ENTRANCE DOOR	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

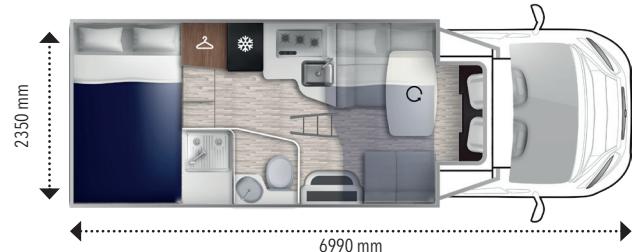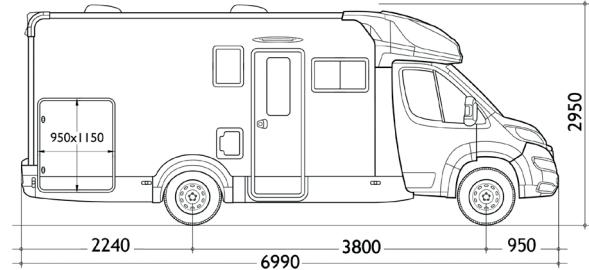

75° ANNIVERSARY

- 75° ANNIVERSARY ADHESIVE
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- WAVE BEIGE UPHOLSTERY
- PIONEER 9" RADIO
- REARVIEW CAMERA
- 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER
- PLEATED CAB BLIND
- WHITE AWNING
- 4 METERS: T-LOFT 450, 529
- 4,5 METERS: T-LOFT 532, 530, 582
- EXTERNAL GAS SOCKET
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12 V / 220 V / TV)
- EQUIPPED GARAGE WALL

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

T-LOFT 529



MECHANICS AND CHASSIS

MECHANICAL UNIT	FIAT DUCATO
ENGINE, POWER	2,2 MJ 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2880
PAY LOAD (KG)	620
WHEELBASE (MM)	3800
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16"
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	6990 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	295 / 208
HOMOLOGATED SEATS	5
BERTHS	5
AUXILIARY BED IN DINETTE	S
REAR BED (CM)	193X80 + 200X80 - 199X212
REAR BED HEIGHT ADJUSTMENT	216X94(58)
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	190X123(103)
ELEVATING BED (CM)	S
LOCKER (USEFUL OPENING, CM)	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	120
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100) / 100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	135
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
SHOWER TRAY WITH DOUBLE DRAIN	S
INTEGRATED AND ISOLATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
CP-PLUS DIGITAL CONTROL PANEL	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (960X655)
CENTRAL SKYLIGHT (MM)	S (400X400)

EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
SWIVELLING LCD HOLDER	S
INTERNAL LED LIGHTENING	S
WINTER PACK	S
ISOFIX	S


EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

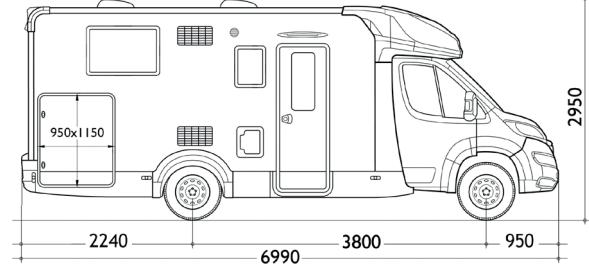

75° ANNIVERSARY

- 75° ANNIVERSARY ADHESIVE
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- WAVE BEIGE UPHOLSTERY
- PIONEER 9" RADIO
- REARVIEW CAMERA
- 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER
- PLEATED CAB BLIND
- WHITE AWNING
- 4 METERS: T-LOFT 450, 529
- 4,5 METERS: T-LOFT 532, 530, 582
- EXTERNAL GAS SOCKET
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12 V / 220 V / TV)
- EQUIPPED GARAGE WALL

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

T-LOFT 530



MECHANICS AND CHASSIS

MECHANICAL UNIT	FIAT DUCATO
ENGINE, POWER	2,2 MJ 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2920
PAY LOAD (KG)	580
WHEELBASE (MM)	4035
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16"
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	7450 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	295 / 208
HOMOLOGATED SEATS	5
BERTHS	5
AUXILIARY BED IN DINETTE	S
REAR BED (MM)	200X80 + 200X80 - 200X212
DIMENSIONS AUXILIARY BED IN DINETTE (MM)	216X94(58)
ELEVATING BED (MM)	190X123(103)
ADDITIONAL SEAT REAR BED	S
LOCKER (USEFUL OPENING, MM)	115X95
MAX. INTERNAL GARAGE HEIGHT (MM)	121
FLOOR / WALLS / ROOF THICKNESS (MM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(100) / 100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	145
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
INTEGRATED AND ISOLATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
CP-PLUS DIGITAL CONTROL PANEL	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (960X655)
CENTRAL SKYLIGHT (MM)	S (400X400)

EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
CLOTHES RAIL IN THE SHOWER	S
SWIVELLING LCD HOLDER	S
INTERNAL LED LIGHTENING	S
WINTER PACK	S
ISOFIX	S



EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S
XLENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

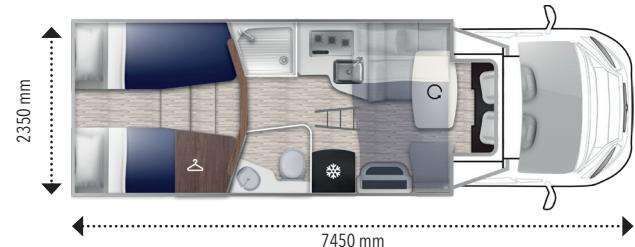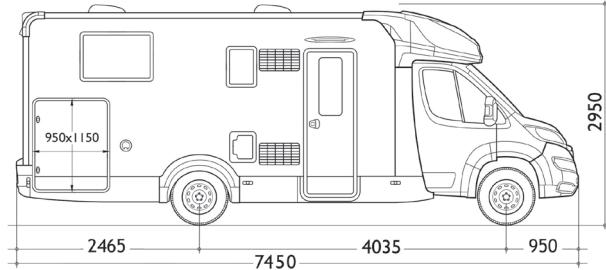

75° ANNIVERSARY

- 75° ANNIVERSARY ADHESIVE
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- WAVE BEIGE UPHOLSTERY
- PIONEER 9" RADIO
- REARVIEW CAMERA
- 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER
- PLEATED CAB BLIND
- WHITE AWNING
- 4 METERS: T-LOFT 450, 529
- 4,5 METERS: T-LOFT 532, 530, 582
- EXTERNAL GAS SOCKET
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12 V / 220 V / TV)
- EQUIPPED GARAGE WALL

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

T-LOFT 532



MECHANICS AND CHASSIS

MECHANICAL UNIT	FIAT DUCATO
ENGINE, POWER	2,2 MJ 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2920
PAY LOAD (KG)	580
WHEELBASE (MM)	4035
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16"
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	7450 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	295 / 208
HOMOLOGATED SEATS	4
BERTHS	4
REAR BED (CM)	200X80 + 200X80 - 200X212
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X103(75) OPT
OVERCAB BED (CM) / ELEVATING BED (CM)	190X123(103)
ADDITIONAL SEAT REAR BED	S
LOCKER (USEFUL OPENING, CM)	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	121
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(120) / 100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	145
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
INTEGRATED AND ISOLATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
CP-PLUS DIGITAL CONTROL PANEL	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (960X655)
CENTRAL SKYLIGHT (MM)	S (400X400)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
CLOTHES RAIL IN THE SHOWER	S
SWIVELLING LCD HOLDER	S
INTERNAL LED LIGHTENING	S
WINTER PACK	S
ISOFIX	S


EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

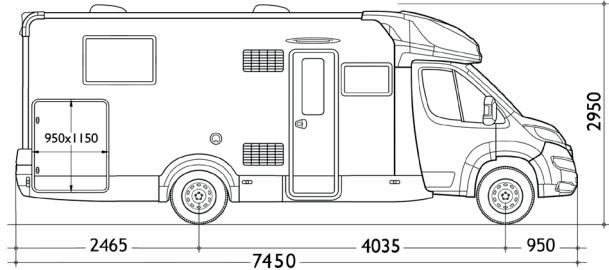

75° ANNIVERSARY

- 75° ANNIVERSARY ADHESIVE
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- WAVE BEIGE UPHOLSTERY
- PIONEER 9" RADIO
- REARVIEW CAMERA
- 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER
- PLEATED CAB BLIND
- WHITE AWNING
- 4 METERS: T-LOFT 450, 529
- 4,5 METERS: T-LOFT 532, 530, 582
- EXTERNAL GAS SOCKET
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12 V / 220 V / TV)
- EQUIPPED GARAGE WALL

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

T-LOFT 582



MECHANICS AND CHASSIS

MECHANICAL UNIT	FIAT DUCATO
ENGINE, POWER	2,2 MJ 140 HP
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS (KG)	2910
PAY LOAD (KG)	590
WHEELBASE (MM)	4035
MAXIMUM TOWABLE WEIGHT (KG)	2000
WHEELS DIMENSIONS	16"
MANUAL AIR CONDITIONING	S
DRIVER AND PASSENGER AIRBAG	S
CRUISE CONTROL WITH SPEED LIMITER	S
ABS / ESC	S/S
DRIVER AND PASSENGER SWIVELLING SEATS	S
CAB SEAT COVERS	S
PAINTED FRONT BUMPER	S
FOG LIGHTS	S

DIMENSIONS AND PLACES

EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	7450 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	295 / 208
HOMOLOGATED SEATS	4
BERTHS	4
REAR BED (CM)	190X150
ELECTRIC REAR BED HEIGHT ADJUSTMENT	S
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	216X103(75) OPT
ELEVATING BED (CM)	190X123(103)
LOCKER (USEFUL OPENING, CM)	115X95
MAX. INTERNAL GARAGE HEIGHT (CM)	125
FLOOR / WALLS / ROOF THICKNESS (CM)	5,4 / 3 / 3
FLOOR / WALLS / ROOF MATERIAL	MTS / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	S

INSTALLATIONS

BURNERS	3
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)	20(120) / 100
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	145
STANDARD HEATING SYSTEM	COMBI DIESEL 4 KW
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	S
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	S
INTEGRATED AND ISOLATED ENTRY STEP	S
HEATED GARAGE LOCKER	S
CP-PLUS DIGITAL CONTROL PANEL	S

SKYLIGHT

PANORAMIC ROOF (MM)	S (1000X800)
REAR SKYLIGHT (MM)	S (400X400) / O (960X655)
CENTRAL SKYLIGHT (MM)	S (400X400)
DOUBLE-GLAZED WINDOWS WITH BLIND / MOSQUITO NET	S

EQUIPMENTS

THERMAL BLIND	S
BEDS WITH STAVES	S
CLOTHES RAIL IN THE SHOWER	S
SWIVELLING LCD HOLDER	S
INTERNAL LED LIGHTENING	S


EXTERIORS

ENTRANCE DOOR WITH FIXED WINDOW	S (XL)
FLYSCREEN FOR ENTRANCE DOOR	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	S
XL ENTRANCE DOOR	S
EXTERNAL LED LIGHT	S

S= standard O=optional - = not available

VTR= Fiberglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

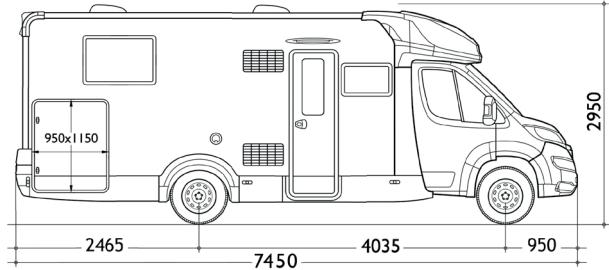

75° ANNIVERSARY

- 75° ANNIVERSARY ADHESIVE
- LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB
- TECHNO DASHBOARD
- ELECTRIC HANDBRAKE
- TPMS (TYRE INFLATION PRESSURE MONITORING SENSOR)
- WAVE BEIGE UPHOLSTERY
- PIONEER 9" RADIO
- REARVIEW CAMERA
- 200 W SOLAR PANEL WITH NEW MPPT CONTROLLER
- PLEATED CAB BLIND
- WHITE AWNING
- 4 METERS: T-LOFT 450, 529
- 4,5 METERS: T-LOFT 532, 530, 582
- EXTERNAL GAS SOCKET
- SHOWER IN THE GARAGE
- EXTERNAL MULTIMEDIA SOCKET (12 V / 220 V / TV)
- EQUIPPED GARAGE WALL

MATIC PACK

- AUTOMATIC TRANSMISSION
- ADHESIVE MATIC
- COMPOSITE SUSPENSION

EXTRA TECH PACK

- FULL DIGITAL CLUSTER
- AUTOMATIC CLIMATE CONTROL SYSTEM
- WIRELESS CHARGER FOR SMARTPHONES
- FULL LED HEADLIGHTS

EXTRA WARM PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [GAS+ELECTRIC]

EXTRA WARM DIESEL PACK

- STEP INSULATION
- ELECTRIC HEATED FLOOR
- TRUMA COMBI 6E HEATING [DIESEL+ELECTRIC]

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

TV DIGIT/SAT PACK

- DIGITAL OR SATELLITE AERIAL
- 24" SMART TV

The masses indicated in this data sheets refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYOUT

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage. All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.